

OTi DALI 35/220...240/400 D NFC TW L

OPTOTRONIC Intelligent Tunable White – DALI (non-isolated) | Linear constant current LED driver – Dimmable



Vlastnosti produktu

- Kmitočet: 0 Hz | 50 Hz | 60 Hz
- Napájecí napětí: 220...240 V

Druh použití


- Instalace do systémů nouzového osvětlení v souladu s IEC 61347-2-13, přílohou J
- Vhodné pro instalaci do systémů nouzového osvětlení v souladu s EN 60598-2-22
- Vhodné pro svítidla třídy ochrany I

Technické údaje


Parametry

Jmenovité vstupní napětí	220...240 V
Síťová frekvence	0/50/60 Hz Hz
Vstupní napětí AC	198...264 V
Vstupní napětí DC	176...276 V
Current set	DALI / NFC / Programmable
Celkové harmonické zkreslení	< 10 %
Účinník λ	047C...095
Efficiency in full-load	90 % ¹⁾
Výkonové ztráty přístroje	3,0 W
Náběhový proud	17 A
Maximální počet předřadníků na 10 A (B)	19
Maximální počet předřadníků na 16 A (B)	28
Maximální počet předřadníků na 25 A (B)	-
Izolační napětí (L/N-zem)	2 kV
Izolační napětí (L-N)	1 kV
Jmenovité výstupní napětí	45...240 V
U-OUT (pracovní napětí)	< 250 V
Jmenovitý výstupní proud	75...400 mA
Default output current	75 mA
Tolerance výstupního proudu	±3 %
Zvlnění výstupního proudu (100 Hz)	< 1 %
Output PSTLM	≤1
Output SVM	≤0.4
Jmenovitý výstupní výkon	4...38 W
Maximální výstupní výkon	38 W
Galvanické oddělení	Non isolated
Výkonová ztráta v módu stand-by	<0.2 W
Galvanické oddělení prim./sek. Strana	-


¹⁾ at 230 V, 50 Hz

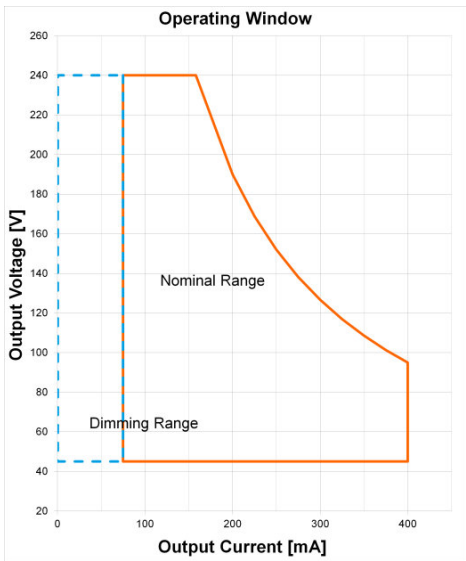


OTI DALI 35220-240400 D NFC TWL Operating Window

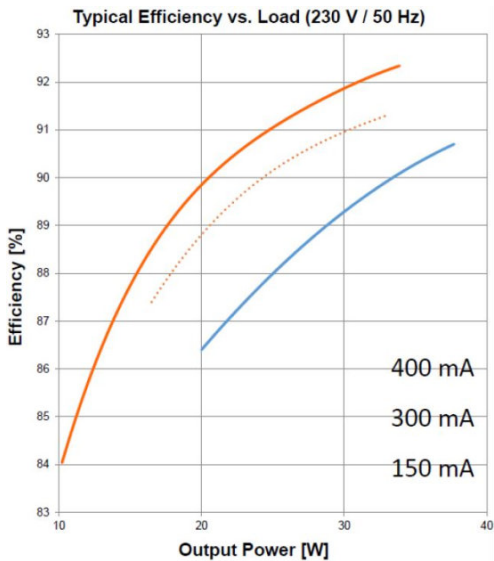

OTI DALI 35220-240400 D NFC TWL Typical Efficiency vs. Load (230 V 50 Hz)

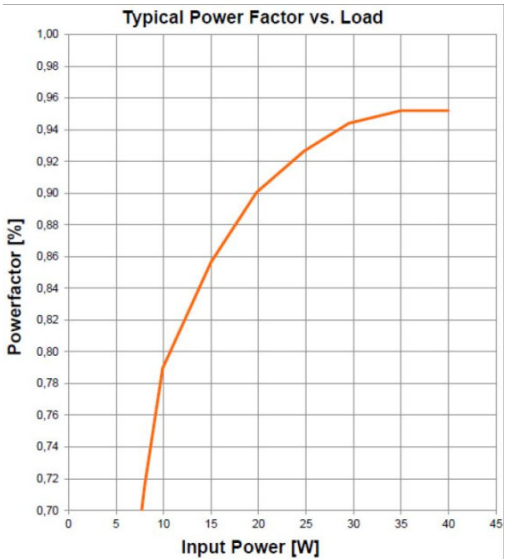


OTI DALI 35220-240400 D NFC TWL Typical Power Factor vs. Load

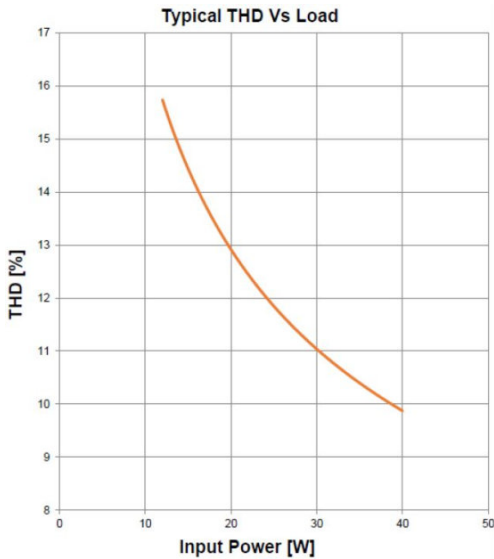

OTI DALI 35220-240400 D NFC TWL Typical THD Vs Load

Rozměry & váha

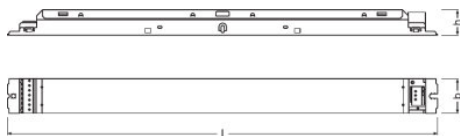

Rozteč montážních otvorů po délce	350,0 mm
Váha výrobku	23500 g
Průřez kabelu, vstupní strana	0,5...1,5 mm ²
Průřez kabelu, výstupní strana	0,5...1,5 mm ²
Délka odizolovaných vodičů, vstupní str.	8,0...9,0 mm
Délka odizolovaných vod., výstupní str.	8,0...9,0 mm
Délka	3600 mm
Šířka	300 mm
Výška	210 mm

Barvy & materiály

Materiál pouzdra	Metal
------------------	-------

Teploty a provozní podmínky

Rozsah okolní teploty	-25...+50 °C
Maximální teplota ve zkušebním bodě tc	75 °C
Maximálníteplota krytu při poruše	110 °C
Skladujte při teplotách od... do	-40...+85 °C
Povolená relativní vlhkost během provozu	5...85 % ¹⁾

¹⁾ max. 56 d/y bei 85%

Životnost

Střední doba života předřadníku	50000 / 100000 h ¹⁾
---------------------------------	--------------------------------

¹⁾ At maximum T_c = 75°C / 10% failure rate / At T_c = 65°C / 10% failure rate

Další údaje o produktu

Zapouzdřený	Ne
-------------	----

Vlastnosti

Programming interface	DALI, NFC
Stmívatelnost	Ano
Rozhraní pro stmívání	DALI-2 / Touch DIM / Touch DIM Sensor
Rozsah stmívání	1...100 %
Způsob stmívání	Full analogue dimming / AM/PWM selectable
Funkce konstantního světelného výkonu	Programmable
Ochrana proti přehřátí	Automatické vypnutí, vratné
Ochrana proti přetížení	Automatické vratné
Ochrana proti zkratu	Automatické vratné
Zkouška naprázdno (bez zátěže)	Ano
Intended for no-load operation	Ne
Max. délka kabelu	2,0 m ¹⁾
Vhodné pro svítidla s třídou ochrany	I
Vhodné pro nouzové osvětlení	Ano
Typ připojení, vstupní strana	Přítlačná svorka
Typ připojení, výstupní strana	Přítlačná svorka
Control interface	DALI
Number of channels	2
DALI-2 Energy Data	Ne
DALI-2 Diagnostic Data	Ne

¹⁾ Output wires must be routed as close as possible to each other

Programming

Programming device	DALI magic / NFC Scanner
Tuner4TRONIC	Ano
Tuner4TRONIC Field App	Ne
Box programming	Yes

Programmable features

Operating Current	Ano
Lamp Operating Time	Ano
Driver Guard	Ano
DALI Settings	Ano
Emergency Mode	Ano
DALI-2 Luminaire Data	Ne
Soft Switch Off	Ano
Dim to Dark	Ano

Technický list výrobku

TouchDIM + Sensor	Ano
Corridor Functionality	Ano
Tunable White CCT	Ano
Tunable White High precision	Ano

Certifikáty & standardy

Povolení – schválení	CE / EL / VDE-ENEC / EAC / CCC / RCM / BIS
Standardy	Podle IEC 61347-1/Podle IEC 61347-2-13/Podle IEC 62384/Podle IEC 61000-3-2/Podle IEC 61000-3-3/Podle IEC 61547
Druh ochrany	IP20

Logistická data

Zkratka produktu	850440829000
------------------	--------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	29-03-2024
Primary Article Identifier	4052899990302 4050732460524
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	d5ddc869-40bf-4840-8ca3-4fa129618d04 5d018f90-f20f-4306-87aa-04a991f4a89a

Text pro technický lis

- Electrical connections between the two output channels are not allowed.

Stahování dat

Soubor	
	User instruction OPTOTRONIC LED Power Supply
	User instruction OPTOTRONIC LED Power Supply
	Certificates OT EMC 40050085 200220
	Certificates OT ENEC 40038085 010322

Technický list výrobku

	Certificates OT EMC 40044675 031022
	Declarations of conformity OTI DALI D NFC TW L UK DoC 4287948 110522
	Declarations of conformity OTI DALI D NFC TW L CE 3633314 110522
	Declarations of conformity EATON(CEAG) Conformity declaration AM28017 OTi DALI35 220-240 400 D NFC TW L
	Declarations of conformity INOTEC Conformity declaration AM28017 OTi DALI35 220-240 400 D NFC TW L
	CAD data OTI DALI D NFC TWL IGS 050220
	CAD data OTI DALI D NFC TWL STEP 050220
	CAD Data 2-dim OTI DALI D NFC TWL CAD2PDF 050220
	CAD data 3-dim OTI DALI D NFC TWL CAD3PDF 050220

Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistické údaje

Kód výrobku	Popis výrobku	Jednotka balení (kusy/jednotku)	Rozměry (délka x šířka x výška)	Objem	Hrubá hmotnost
4052899990302	OTi DALI 35/220...240/400 D NFC TW L	Shipping carton box 20	385 mm x 160 mm x 100 mm	6.16 dm ³	4871.00 g

Zmíněný produktový kód udává nejmenší jednotku množství, kterou lze objednat. Jednotka balení může obsahovat jeden nebo více samostatných produktů. Při objednávání zadávejte jednotky balení nebo násobky jednotek balení.

ochrana dat

Technický list výrobku

This OSRAM driver can be configured using the Tuner4TRONIC software. This requires registering on www.myosram.com and downloading the Tuner4TRONIC software from the Internet. The Tuner4TRONIC software enables users to access and view the operational data of a luminaire or driver via the corresponding programming interfaces. A password key (Config Lock) must be set up in the driver via the Tuner4TRONIC software in order to control which users can access and view operational data. Follow the instructions for password setup. To grant an external person or company rights to access or view operational data, you can assign password keys. In this case, however, you are responsible for ensuring that the third party concerned takes notice of the information described here. However, OSRAM can read out operating data from devices for maintenance and service purposes even when a password key has been assigned. In individual cases, OSRAM will also use its access rights in order to optimize or improve driver hardware and driver functions. In accordance with data privacy principles, any user of operating data (luminaire manufacturers, third parties with access rights) must ensure that personal data (e.g. name, address, location IDs) are only merged with the prior written consent of the person (end user) concerned. The respective user of the operating data is responsible for providing evidence of consent.

Vyloučení odpovědnosti

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.