

PrevaLED Linear G6 CRI90

Lineární osvětlovací jednotky



Vlastnosti produktu

- Dostupné se světelným tokem: 2 200 lm nebo 4 000 lm na 560 mm

Výhody produktu

- High voltage (HV) optimized for non-isolated, low voltage (LV) optimized for SELV operation

Druh použití

- Office
- Průmysl



Technický list řady výrobků

Technické údaje

Popis výrobku	Parametry				
	Jmenovité napětí	Jmenovitý proud	Proudové zatížení	Energy consumption in on-mode [AGGR]	On-mode power [AGGR]
PL-LIN-Z6 245-930 62X20-HV	530 V	03 A	stejnoseměrný proud (DC)	1.7 kWh/1000h	1.70 W
PL-LIN-Z6 245-940 62X20-HV	530 V	03 A	stejnoseměrný proud (DC)	1.7 kWh/1000h	1.70 W
PL-LIN-Z6 275-930 70X20-LV	238 V	0075 A	stejnoseměrný proud (DC)	1.9 kWh/1000h	1.90 W
PL-LIN-Z6 275-940 70X20-LV	238 V	0075 A	stejnoseměrný proud (DC)	1.8 kWh/1000h	1.80 W
PL-LIN-Z6 1100-930 280X20-LV/HV	23,8 V	0,3 A	stejnoseměrný proud (DC)	7.4 kWh/1000h	7.40 W
PL-LIN-Z6 1100-940 280X20-LV/HV	23,8 V	0,3 A	stejnoseměrný proud (DC)	7.4 kWh/1000h	7.40 W
PL-LIN-Z6 1100-950 280X20-LV/HV	238 V	03 A	stejnoseměrný proud (DC)	7.4 kWh/1000h	7.40 W
PL-LIN-Z6 2000-930 280X20-LV/HV	43,2 V	0,3 A	stejnoseměrný proud (DC)	13.4 kWh/1000h	13.40 W
PL-LIN-Z6 2000-940 280X20-LV/HV	43,2 V	0,3 A	stejnoseměrný proud (DC)	13.4 kWh/1000h	13.40 W
PL-LIN-Z6 2000-950 280X20-LV/HV	43,2 V	0,3 A	stejnoseměrný proud (DC)	13.4 kWh/1000h	13.40 W
PL-LIN-Z6 2200-930 560X20-HV	477 V	03 A	stejnoseměrný proud (DC)	14.9 kWh/1000h	14.90 W
PL-LIN-Z6 2200-930 560X20-LV	238 V	06 A	stejnoseměrný proud (DC)	15.0 kWh/1000h	15.00 W
PL-LIN-Z6 2200-940 560X20-HV	477 V	03 A	stejnoseměrný proud (DC)	14.8 kWh/1000h	14.80 W
PL-LIN-Z6 2200-940 560X20-LV	238 V	06 A	stejnoseměrný proud (DC)	14.5 kWh/1000h	14.50 W
PL-LIN-Z6 2200-950 560X20-HV	477 V	03 A	stejnoseměrný proud (DC)	14.8 kWh/1000h	14.80 W
PL-LIN-Z6 2200-950 560X20-LV	238 V	06 A	stejnoseměrný proud (DC)	14.9 kWh/1000h	14.90 W

Technický list řady výrobků

Popis výrobku	Parametry				
	Jmenovité napětí	Jmenovitý proud	Proudové zatížení	Energy consumption in on-mode [AGGR]	On-mode power [AGGR]
PL-LIN-Z6 4000-930 560X20-HV	865 V	03 A	stejnoseměrný proud (DC)	26.8 kWh/1000h	26.80 W
PL-LIN-Z6 4000-930 560X20-LV	432 V	06 A	stejnoseměrný proud (DC)	26.9 kWh/1000h	26.90 W
PL-LIN-Z6 4000-940 560X20-HV	865 V	03 A	stejnoseměrný proud (DC)	26.6 kWh/1000h	26.60 W
PL-LIN-Z6 4000-940 560X20-LV	432 V	06 A	stejnoseměrný proud (DC)	26.6 kWh/1000h	26.60 W
PL-LIN-Z6 4000-950 560X20-HV	865 V	03 A	stejnoseměrný proud (DC)	26.6 kWh/1000h	26.60 W
PL-LIN-Z6 4000-950 560X20-LV	43,2 V	0,6 A	stejnoseměrný proud (DC)	26.5 kWh/1000h	26.50 W

Popis výrobku	Fotometrické údaje			
	Světelná účinnost	Useful luminous flux (Φuse) [AGGR]	Colour consistency (McAdam ellipses) [AGGR]	Correlated color temperature CCT [AGGR]
PL-LIN-Z6 245-930 62X20-HV	145 lm/W	228 lm	3	3000 K
PL-LIN-Z6 245-940 62X20-HV	164 lm/W	249 lm	3	4000 K
PL-LIN-Z6 275-930 70X20-LV	145 lm/W	258 lm	3	3000 K
PL-LIN-Z6 275-940 70X20-LV	164 lm/W	276 lm	3	4000 K
PL-LIN-Z6 1100-930 280X20-LV/HV	145 lm/W	1039 lm	3	3000 K
PL-LIN-Z6 1100-940 280X20-LV/HV	164 lm/W	1123 lm	3	4000 K
PL-LIN-Z6 1100-950 280X20-LV/HV	164 lm/W	1153 lm	3	5000 K
PL-LIN-Z6 2000-930 280X20-LV/HV	140 lm/W	1821 lm	3	3000 K
PL-LIN-Z6 2000-940 280X20-LV/HV	158 lm/W	1969 lm	3	4000 K
PL-LIN-Z6 2000-950 280X20-LV/HV	158 lm/W	2033 lm	3	5000 K
PL-LIN-Z6 2200-930 560X20-HV	145 lm/W	2079 lm	3	3000 K
PL-LIN-Z6 2200-930 560X20-LV	145 lm/W	2079 lm	3	3000 K
PL-LIN-Z6 2200-940 560X20-HV	164 lm/W	2222 lm	3	4000 K
PL-LIN-Z6 2200-940 560X20-LV	164 lm/W	2191 lm	3	4000 K
PL-LIN-Z6 2200-950 560X20-HV	164 lm/W	2304 lm	3	5000 K
PL-LIN-Z6 2200-950 560X20-LV	164 lm/W	2303 lm	3	5000 K
PL-LIN-Z6 4000-930 560X20-HV	140 lm/W	3660 lm	3	3000 K
PL-LIN-Z6 4000-930 560X20-LV	140 lm/W	3660 lm	3	3000 K
PL-LIN-Z6 4000-940 560X20-HV	158 lm/W	3902 lm	3	4000 K
PL-LIN-Z6 4000-940 560X20-LV	158 lm/W	3807 lm	3	4000 K
PL-LIN-Z6 4000-950 560X20-HV	158 lm/W	4043 lm	3	5000 K
PL-LIN-Z6 4000-950 560X20-LV	158 lm/W	4055 lm	3	5000 K

Technický list řady výrobků

Popis výrobku	Index podání barev Ra	Informace o LED modulech	Rozměry & váha		
		Počet LED v modulu	Váha výrobku	Width EPREL [AGGR]	Length EPREL [AGGR]
PL-LIN-Z6 245-930 62X20-HV	90	8	500 g	20.0 mm	62.0 mm
PL-LIN-Z6 245-940 62X20-HV	90	8	500 g	20.0 mm	62.0 mm
PL-LIN-Z6 275-930 70X20-LV	90	9	500 g	20.0 mm	70.0 mm
PL-LIN-Z6 275-940 70X20-LV	90	9	500 g	20.0 mm	70.0 mm
PL-LIN-Z6 1100-930 280X20-LV/HV	90	36	20,00 g	20.0 mm	280.0 mm
PL-LIN-Z6 1100-940 280X20-LV/HV	90	36	20,00 g	20.0 mm	280.0 mm
PL-LIN-Z6 1100-950 280X20-LV/HV	90	36	2000 g	20.0 mm	280.0 mm
PL-LIN-Z6 2000-930 280X20-LV/HV	90	72	20,00 g	20.0 mm	280.0 mm
PL-LIN-Z6 2000-940 280X20-LV/HV	90	48	20,00 g	20.0 mm	280.0 mm
PL-LIN-Z6 2000-950 280X20-LV/HV	90	48	20,00 g	20.0 mm	280.0 mm
PL-LIN-Z6 2200-930 560X20-HV	90	72	4000 g	20.0 mm	560.0 mm
PL-LIN-Z6 2200-930 560X20-LV	90	72	4000 g	20.0 mm	560.0 mm
PL-LIN-Z6 2200-940 560X20-HV	90	72	4000 g	20.0 mm	560.0 mm
PL-LIN-Z6 2200-940 560X20-LV	90	48	4000 g	20.0 mm	560.0 mm
PL-LIN-Z6 2200-950 560X20-HV	90	72	4000 g	20.0 mm	560.0 mm
PL-LIN-Z6 2200-950 560X20-LV	90	48	4000 g	20.0 mm	560.0 mm
PL-LIN-Z6 4000-930 560X20-HV	90	96	4000 g	20.0 mm	560.0 mm
PL-LIN-Z6 4000-930 560X20-LV	90	96	4000 g	20.0 mm	560.0 mm
PL-LIN-Z6 4000-940 560X20-HV	90	96	4000 g	20.0 mm	560.0 mm
PL-LIN-Z6 4000-940 560X20-LV	90	96	4000 g	20.0 mm	560.0 mm
PL-LIN-Z6 4000-950 560X20-HV	90	96	4000 g	20.0 mm	560.0 mm
PL-LIN-Z6 4000-950 560X20-LV	90	96	40,00 g	20.0 mm	560.0 mm

Popis výrobku	Height EPREL [AGGR]	Teploty a provozní podmínky			
		Provozní tepl. podle IEC 62717	Provozní rozsah teplot	Maximální teplota ve zkušebním bodě tc	Skladujte při teplotách od... do
PL-LIN-Z6 245-930 62X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 245-940 62X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 275-930 70X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 275-940 70X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 1100-930 280X20-LV/HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 1100-940 280X20-LV/HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 1100-950 280X20-LV/HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2000-930 280X20-LV/HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2000-940 280X20-LV/HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2000-950 280X20-LV/HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2200-930 560X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2200-930 560X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2200-940 560X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2200-940 560X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2200-950 560X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 2200-950 560X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C

Technický list řady výrobků

Popis výrobku	Height EPREL [AGGR]	Teploty a provozní podmínky			
		Provozní tepl. podle IEC 62717	Provozní rozsah teplot	Maximální teplota ve zkušebním bodě tc	Skladujte při teplotách od... do
PL-LIN-Z6 4000-930 560X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 4000-930 560X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 4000-940 560X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 4000-940 560X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 4000-950 560X20-HV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C
PL-LIN-Z6 4000-950 560X20-LV	5.0 mm	50 °C	-20...75 °C	75 °C	-30...85 °C

Popis výrobku	Rozsah okolní teploty	Životnost		Další údaje o produktu
		L70B50 lifetime [AGGR]	Lumen maintenance factor LMF [AGGR]	Lighting technology used [AGGR]
PL-LIN-Z6 245-930 62X20-HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 245-940 62X20-HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 275-930 70X20-LV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 275-940 70X20-LV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 1100-930 280X20-LV/HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 1100-940 280X20-LV/HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 1100-950 280X20-LV/HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2000-930 280X20-LV/HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2000-940 280X20-LV/HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2000-950 280X20-LV/HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2200-930 560X20-HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2200-930 560X20-LV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2200-940 560X20-HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2200-940 560X20-LV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2200-950 560X20-HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 2200-950 560X20-LV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 4000-930 560X20-HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 4000-930 560X20-LV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 4000-940 560X20-HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 4000-940 560X20-LV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 4000-950 560X20-HV	-20...+75 °C	100000 h	96	LED
PL-LIN-Z6 4000-950 560X20-LV	-20...+75 °C	100000 h	96	LED

Popis výrobku	Doporučená náhrada EAN	Certifikáty & standardy		Logistická data
		Standardy	Energy efficiency class [AGGR]	Zkratka produktu
PL-LIN-Z6 245-930 62X20-HV		CE/ENEC/VDE	E	85414100000
PL-LIN-Z6 245-940 62X20-HV		CE/ENEC/VDE	D	85414100000
PL-LIN-Z6 275-930 70X20-LV		CE/ENEC/VDE	E	85414100000
PL-LIN-Z6 275-940 70X20-LV		CE/ENEC/VDE	D	85414100000
PL-LIN-Z6 1100-930 280X20-LV/HV	4052899984899	CE/ENEC/VDE	E	85414100000
PL-LIN-Z6 1100-940 280X20-LV/HV	4052899984905	CE/ENEC/VDE	D	85414100000
PL-LIN-Z6 1100-950 280X20-LV/HV	4052899984912	CE/ENEC/VDE	D	85414100000

Technický list řady výrobků


		Certifikáty & standardy		Logistická data
Popis výrobku	Doporučená náhrada EAN	Standardy	Energy efficiency class [AGGR]	Zkratka produktu
PL-LIN-Z6 2000-930 280X20-LV/HV	4052899985087	CE/ENEC/VDE	E	85414100000
PL-LIN-Z6 2000-940 280X20-LV/HV	4052899985094	CE/ENEC/VDE	D	85414100000
PL-LIN-Z6 2000-950 280X20-LV/HV	4052899985100	CE/ENEC/VDE	D	85414100000
PL-LIN-Z6 2200-930 560X20-HV		CE/ENEC/VDE	E	85395100000
PL-LIN-Z6 2200-930 560X20-LV	4052899985278	CE/ENEC/VDE	E	85414100000
PL-LIN-Z6 2200-940 560X20-HV		CE/ENEC/VDE	D	85395100000
PL-LIN-Z6 2200-940 560X20-LV	4052899985285	CE/ENEC/VDE	D	85414100000
PL-LIN-Z6 2200-950 560X20-HV		CE/ENEC/VDE	D	85395100000
PL-LIN-Z6 2200-950 560X20-LV	4052899985292	CE/ENEC/VDE	D	85414100000
PL-LIN-Z6 4000-930 560X20-HV		CE/ENEC/VDE	E	85395100000
PL-LIN-Z6 4000-930 560X20-LV	4052899985469	CE/ENEC/VDE	E	85414100000
PL-LIN-Z6 4000-940 560X20-HV		CE/ENEC/VDE	D	85395100000
PL-LIN-Z6 4000-940 560X20-LV	4052899985476	CE/ENEC/VDE	E	85414100000
PL-LIN-Z6 4000-950 560X20-HV		CE/ENEC/VDE	D	85395100000
PL-LIN-Z6 4000-950 560X20-LV	4052899985483	CE/ENEC/VDE	D	85414100000

Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)				
Popis výrobku	Date of Declaration	Primary Article Identifier	Candidate List Substance 1	Declaration No. in SCIP database
PL-LIN-Z6 245-930 62X20-HV	18-04-2022	4052899607965	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 245-940 62X20-HV	18-04-2022	4052899607972	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 275-930 70X20-LV	18-04-2022	4052899607989	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 275-940 70X20-LV	18-04-2022	4052899607996	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 1100-930 280X20-LV/HV	18-04-2022	4052899606760	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 1100-940 280X20-LV/HV	18-04-2022	4052899606777	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 1100-950 280X20-LV/HV	18-04-2022	4052899606784	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2000-930 280X20-LV/HV	18-04-2022	4052899606791	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2000-940 280X20-LV/HV	10-08-2023	4052899606807	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2000-950 280X20-LV/HV	23-08-2023	4052899606814	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2200-930 560X20-HV	23-08-2023	4052899606883	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2200-930 560X20-LV	23-08-2023	4052899606821	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2200-940 560X20-HV	10-08-2023	4052899606890	No declarable substances contained	No declarable substances contained


Technický list řady výrobků

Popis výrobku	Environmental information			
	Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)			
Popis výrobku	Date of Declaration	Primary Article Identifier	Candidate List Substance 1	Declaration No. in SCIP database
PL-LIN-Z6 2200-940 560X20-LV	18-04-2022	4052899606838	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2200-950 560X20-HV	23-08-2023	4052899606906	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 2200-950 560X20-LV	18-04-2022	4052899606845	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 4000-930 560X20-HV	18-04-2022	4052899606913	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 4000-930 560X20-LV	18-04-2022	4052899606852	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 4000-940 560X20-HV	18-04-2022	4052899606920	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 4000-940 560X20-LV	18-04-2022	4052899606869	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 4000-950 560X20-HV	18-04-2022	4052899606937	No declarable substances contained	No declarable substances contained
PL-LIN-Z6 4000-950 560X20-LV	18-04-2022	4052899606876	No declarable substances contained	No declarable substances contained


Technický list řady výrobků

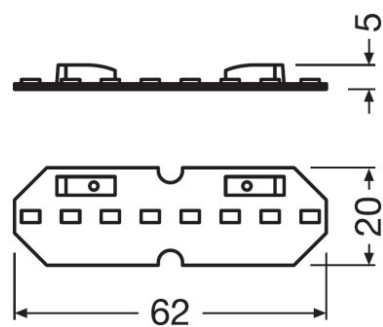


PL-LIN-Z6 245-830 62x20-HV

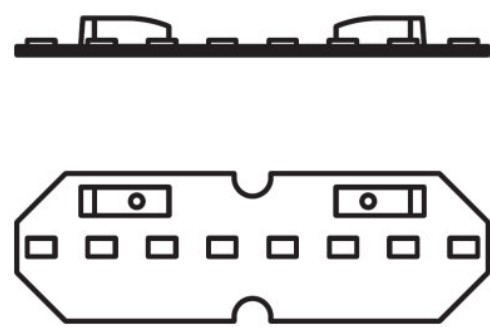


PL-LIN-Z6 245-830 62x20-HV

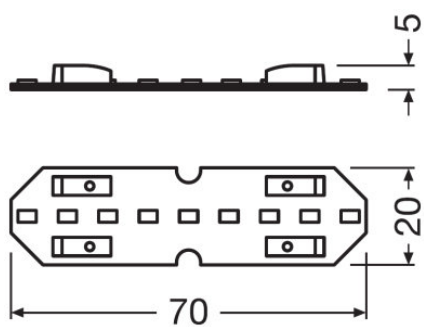


PL-LIN-Z6 275-827 70x20-LV

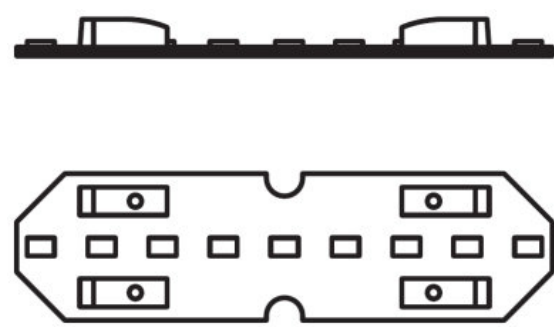

PL-LIN-Z6 275-827 70x20-LV



PL-LIN-Z6 1100-827 280X20-LVHV




PL-LIN-Z6 1100-827 280X20-LVHV

Technický list řady výrobků




PL-LIN-Z6 2000-827 280X20-LVHV




PL-LIN-Z6 2200-827 560X20-HV




PL-LIN-Z6 2200-827 560X20-HV



PL-LIN-Z6 2200-827 560X20-LV




PL-LIN-Z6 2200-827 560X20-LV



PL-LIN-Z6 4000-827 560X20-HV

Technický list řady výrobků



PL-LIN-Z6 4000-865 560x20-LV

Pokyny k použití

Podrobnější informace k použití a grafiku najdete v technickém listu.

Text pro technický lis

– When parallel wiring, tolerance-related differences in output are possible and may cause deviations in brightness.

Technická podpora a podpora prodeje

Technická podpora a podpora prodeje www.osram.cz

Stažení dat

Soubor	
	Certificates PL ENEC 40031612 250723
	Declarations of conformity PL LIN Z6 CE 3812352 090823
	CAD data 3-dim PL LIN Z6 245 62x20 HV CADPDF 240220
	CAD data 3-dim PL LIN Z6 275 70x20 LV CADPDF 220819
	CAD data 3-dim PL LIN Z5 Z6 1100 280x20 LV HV CADPDF 240220
	CAD data 3-dim PL LIN Z5 Z6 2000 280x20 LV HV CADPDF 240220
	CAD data 3-dim PL LIN Z5 Z6 2200 560x20 HV CADPDF 240220

Technický list řady výrobků

	Declarations of conformity EU Declaration of conformity PL-LIN-Z4 family
	Declarations of conformity Declaraton of conformity PL-LIN-Z4
	CAD data 3-dim PL LIN Z5 Z6 2200 560x20 LV CADPDF 240220
	User instruction PrevaLED Linear G5 G6
	CAD data 3-dim PL LIN Z5 Z6 4000 560x20 HV CADPDF 240220
	CAD data 3-dim PL LIN Z5 Z6 4000 560x20 LV CADPDF 240220

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistické údaje

Kód výrobku	Popis výrobku	Jednotka balení (kusy/jednotku)	Rozměry (délka x šířka x výška)	Objem	Hrubá hmotnost
4052899607965	PL-LIN-Z6 245-930 62X20-HV	Shipping carton box 60	290 mm x 172 mm x 95 mm	4.74 dm ³	498.00 g
4052899607972	PL-LIN-Z6 245-940 62X20-HV	Shipping carton box 60	290 mm x 172 mm x 95 mm	4.74 dm ³	498.00 g
4052899607989	PL-LIN-Z6 275-930 70X20-LV	Shipping carton box 60	290 mm x 172 mm x 95 mm	4.74 dm ³	466.00 g
4052899607996	PL-LIN-Z6 275-940 70X20-LV	Shipping carton box 60	290 mm x 172 mm x 95 mm	4.74 dm ³	466.00 g
4052899606760	PL-LIN-Z6 1100-930 280X20-LV/HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	1632.00 g
4052899606777	PL-LIN-Z6 1100-940 280X20-LV/HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	1632.00 g
4052899606784	PL-LIN-Z6 1100-950 280X20-LV/HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	1632.00 g
4052899606791	PL-LIN-Z6 2000-930 280X20-LV/HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	1632.00 g
4052899606807	PL-LIN-Z6 2000-940 280X20-LV/HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	1632.00 g

Technický list řady výrobků

Logistické údaje

4052899606814	PL-LIN-Z6 2000-950 280X20-LV/HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	1632.00 g
4052899606883	PL-LIN-Z6 2200-930 560X20-HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606821	PL-LIN-Z6 2200-930 560X20-LV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606890	PL-LIN-Z6 2200-940 560X20-HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606838	PL-LIN-Z6 2200-940 560X20-LV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606906	PL-LIN-Z6 2200-950 560X20-HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606845	PL-LIN-Z6 2200-950 560X20-LV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606913	PL-LIN-Z6 4000-930 560X20-HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606852	PL-LIN-Z6 4000-930 560X20-LV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606920	PL-LIN-Z6 4000-940 560X20-HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606869	PL-LIN-Z6 4000-940 560X20-LV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606937	PL-LIN-Z6 4000-950 560X20-HV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g
4052899606876	PL-LIN-Z6 4000-950 560X20-LV	Shipping carton box 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g

Zmíněný produktový kód udává nejmenší jednotku množství, kterou lze objednat. Jednotka balení může obsahovat jeden nebo více samostatných produktů. Při objednávání zadávejte jednotky balení nebo násobky jednotek balení.

Vyloučení odpovědnosti

Změny bez předchozího upozornění vyhrazeny. Chyby a opomenutí vyhrazeny. Vždy se ujistěte, že používáte nejnovější vydání.