

RGB 4pin LINEARlight Flex IP67 Connector

Accessories for Flexible LED strips

Vlastnosti produktu

- Quick and easy installation
- Compatible with TEC Flex



Výhody produktu

- Jednoduchá instalace, není třeba použít žádné nástroje ani pájení (CONNECTsystem)
- Kratší doba montáže (CONNECTsystem)
- Možnost připojení na čelní části modulu nebo v dělicích bodech (CONNECTsystem)
- Plochý tvar (CONNECTsystem)


Technický list řady výrobků

Technické údaje

Popis výrobku	Rozměry & váha		Další údaje o produktu		Logistická data
	Délka	Váha výrobku	Doporučená náhrada EAN	Doporučená náhrada EAN	Zkratka produktu
LF -4CONN Protect	300 mm	2000 g	4062172016452	4008321977090	85444290900
LF -ENDCAP Protect	137 mm	050 g	4062172016438	4008321977106	39269097900
LF -4PIN Protect - Installation Kit	300 mm	2000 g	4062172016490	4008321977076	854442909000

Popis výrobku	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)		
	Date of Declaration	Primary Article Identifier	Declaration No. in SCIP database
LF -4CONN Protect	26-04-2024	4062172016452	In work
LF -ENDCAP Protect	06-01-2023	4062172016438	In work
LF -4PIN Protect - Installation Kit	30-08-2022	4008321977076 4062172016490	In work


Technický list řady výrobků

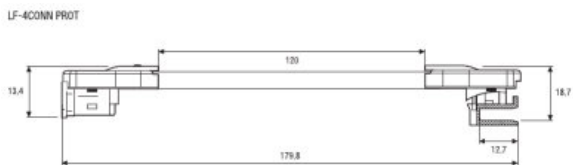

324203_LF-4CONN PROT



324488_LF-4PIN PROT



329588_LF-ENDCAP PROT

327681_LF-4PIN-PROT

Pokyny k použití

Podrobnější informace k použití a grafiku najdete v technickém listu.

Technická podpora a podpora prodeje

Technická podpora a podpora prodeje www.osram.cz

Stažení dat

Soubor	
	Brochures Light is freedom of design (EN)
	Brochures CONNECTION System for LINEARlight FLEX and TEC Flex IP00 - Quick installation guide

Technický list řady výrobků

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistické údaje

Kód výrobku	Popis výrobku	Jednotka balení (kusy/jednotku)	Rozměry (délka x šířka x výška)	Objem	Hrubá hmotnost
4062172016452	LF -4CONN Protect	Shipping carton box 10	230 mm x 150 mm x 340 mm	11.73 dm ³	625.00 g
4062172016438	LF -ENDCAP Protect	Shipping carton box 10	338 mm x 140 mm x 141 mm	6.67 dm ³	260.00 g
4062172016490	LF -4PIN Protect - Installation Kit	Shipping carton box 10	570 mm x 150 mm x 340 mm	29.07 dm ³	1097.00 g

Zmíněný produktový kód udává nejmenší jednotku množství, kterou lze objednat. Jednotka balení může obsahovat jeden nebo více samostatných produktů. Při objednávání zadávejte jednotky balení nebo násobky jednotek balení.

Vyloučení odpovědnosti

Změny bez předchozího upozornění vyhrazeny. Chyby a opomenutí vyhrazeny. Vždy se ujistěte, že používáte nejnovější vydání.